
OPERATION CHART: MODULE QW-753


READING THE DISPLAY

- Press Ⓒ to change from mode to mode.
- After you perform an operation in any mode, pressing Ⓒ returns to the TIME.

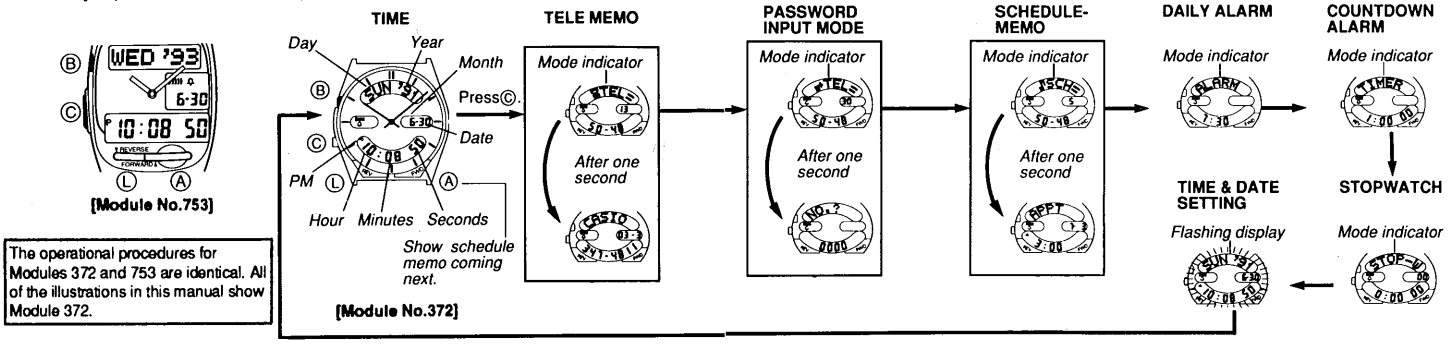

OPERATING TELEMEMO

A maximum of 50 records of 8 letters and 12 numerals can be stored in memory. Press Ⓐ or Ⓛ to search the memory contents. Keep pressed for high speed search. Used pages are automatically in TELEMEMO mode stored in alphabetical order.
Password function keeps memories private.

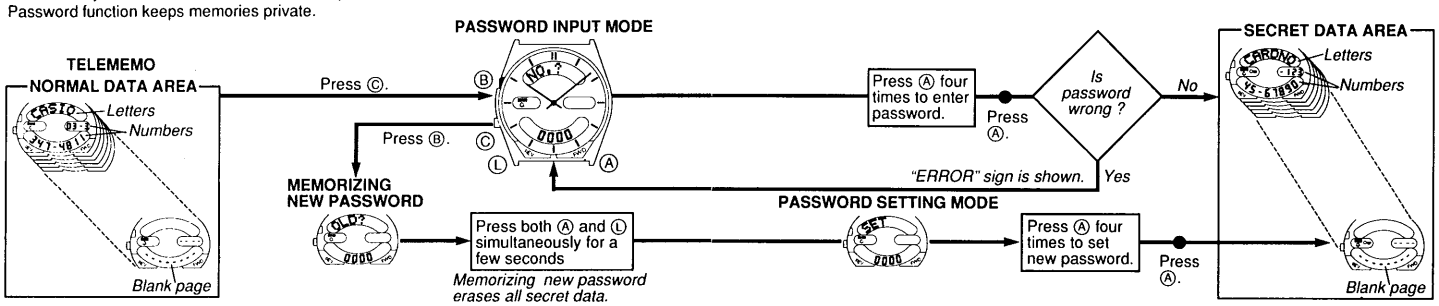


ALTERATION OF PASSWORD


1) Press Ⓑ in password input mode.
2) Press Ⓐ four times to enter old password.
3) Press Ⓐ four times to enter new password.

MEMORIZING NEW NUMBERS

1) Press Ⓐ or Ⓛ in the normal data or secret data area to search a blank page or numbers to be revised.
2) Press Ⓑ to set new letters and numerals.
3) A letter can be entered at cursor position by pressing Ⓐ or Ⓛ. The cursor can be shifted by pressing Ⓒ. Keep pressed for high speed movement.



4) A number can be entered at the cursor position by pressing Ⓐ or Ⓛ. The cursor can be shifted by pressing Ⓒ . Keep pressed for high speed movement.




5) Press Ⓑ to complete memorizing.
(Auto-retrieve function)
The display automatically returns to the initial tele memo, if left unused for a few minutes.

* *To clear all the contents of a page, press both Ⓐ and Ⓛ simultaneously while storing letters.*

SCROLLING THE DISPLAY

When the record is input with over 6 characters, the display will scroll from right to left to show the remainder of the characters.

OPERATING SCHEDULE-MEMO



50 records of 12-character message and date/time can be memorized. Beeper sounds for 20 seconds at scheduled time. Press any button to stop beeper.


* Memories shared between telememo and schedule-memo modes.

SEARCHING SCHEDULE-MEMO

When the display is converted to this schedule-memo, next schedule-memo will be shown. Press Ⓐ to search the memory contents sequentially, and Ⓛ to reverse. When it passes date written in the schedule-memo, the schedule-memo is automatically erased.

INPUTTING SCHEDULE-MEMO

1) Press Ⓐ or Ⓛ in the schedule-memo to search a blank record or records to be revised.
2) Press Ⓑ to set new letters and numerals.
3) A number/letter can be entered at cursor position by pressing Ⓐ or Ⓛ. The cursor can be shifted by pressing Ⓒ. Keep pressed for high speed movement.



5 types of preset message
This simplifies input because it lets you specify any of the following messages.

No.	Abbrev.	Contents
1	TEL	Telephone
2	MTG	Meeting
3	APPT	Appointment
4	TRVL	Travel
5	DR.	Doctor

* *To clear all the contents of a page, press both Ⓐ and Ⓛ simultaneously, then "CLEAR" is displayed.*

4) Press Ⓑ to complete memorizing.

OPERATING DAILY ALARM


Beeper sounds for 20 seconds at preset time every day until cleared when daily alarm is set. Press any button to stop beeper. Signal sounds every hour on the hour if time signal is set.

SOUND DEMONSTRATION

Press and hold Ⓐ in alarm mode to sound beeper.

SETTING DAILY ALARM

1) Press Ⓑ to set new time.
2) Press Ⓒ to shift flashing digit(s). Digit(s) to be changed will flash.




3) Each press of Ⓐ advances flashing digits one by one and Ⓛ reverses them. Keep pressed to move quickly.
4) Press Ⓑ to complete setting.


AUTO-RETRIEVE FUNCTION

Display automatically returns to initial daily alarm time if left unused for a few minutes.

ON OR OFF SETTING OF DAILY ALARM AND TIME SIGNAL

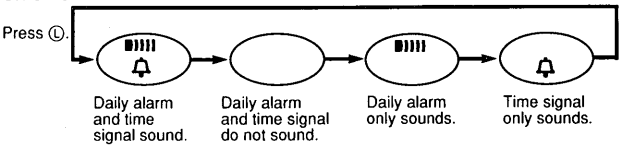


SETTING ANALOG TIMEKEEPING



Press Ⓑ to advance. Keep pressed for quick advancing.

OPERATING COUNTDOWN ALARM




Countdown can be set from 1 minute to 24 hours (display shows 0:00 00). Start/stop operation is possible by pressing Ⓐ, and is confirmed by a signal.
When display reaches zero, beeper sounds for 10 seconds until any button is pressed.

SETTING COUNTDOWN TIME

1) Press Ⓑ to set new time.
2) Press Ⓒ to shift flashing digit(s). Digit(s) to be changed will flash.

Press Ⓒ.




3) Each press of Ⓐ advances flashing digits one by one and Ⓛ reverses them. Keep pressed to move quickly.
4) Press Ⓑ to complete setting.

Auto-retrieve function
Display automatically returns to initial countdown timer if left unused for a few minutes.


Repeat function
Pre-entered time is retrieved when display reaches zero.

OPERATING STOPWATCH




A signal confirms start/stop and split/reset operation.
Working range Total elapsed time display is limited to 23 hours 59 minutes 59.99 seconds.
For longer times reset and start again.


a) Net time measurement




b) Split time measurement




c) 1st-2nd place times



SETTING TIME AND DATE



1) Press Ⓑ in the setting time and date mode to set time and date.
2) Press Ⓐ on a time signal to correct seconds.
3) Press Ⓒ to shift flashing digit (s). Digit (s) to be changed will flash.



4) Each press of Ⓐ advances flashing digits one by one and Ⓛ reverses them. Keep pressed to move quickly.
* *Year digits can be set up to the year 2029 by inputting last two digits.*
5) Press Ⓑ to complete setting.

AUTO-RETRIEVE FUNCTION
Display automatically returns to time if left unused for a few minutes.