
# Operation Guide ANA(ST3)V.A

CASIO

## 時刻・カレンダーの合わせ方

※ 機種により形状は異なります。

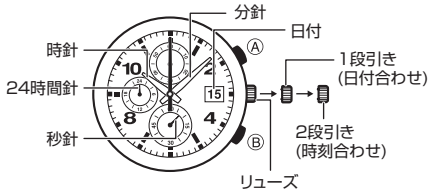


### ■時刻の合わせ方

(1) リューズを２段引きます。
※ この時､秒針が12時の位置まで移動して止まります。
(2) リューズを回して、時刻を合わせます。
(3) リューズを押し込みます。

※ 時刻を合わせるときは、針を正転方向（進む方向）に回して合わせてゆき、分針を正しい時刻より４～５分進めてから逆に戻して合わせると正確に合わせることができます。
※ 時報は「時報サービス 117 番」が便利です。

★ 24時間針は時･分針に連動しています（24時間で１回転します）。

### ■日付の合わせ方

(1) リューズを１段引きます。
(2) リューズを回して、日付を合わせます。
(3) リューズを押し込みます。

※ 日付は31日制になっていますので、2、4、6、9、11月の月末には必ず修正してください。
※ 午後９時～午前１時の間は、日付合わせを行なわないでください（この間に日付合わせをすると翌日になっても変わらないことがあります）。

## ストップウオッチの使い方

本機は、1/100秒単位で59分59秒（60分計）まで計測でき、以後０に戻って計測し続けます。

### ■計測のしかた

Ⓐボタンを押すごとに計測がスタート／ストップします。
※ リューズを引いた状態では計測を行なわないでください。




#### ●計測開始～60秒までは


計測開始と同時にストップウオッチ用の1/100秒針と秒針が動き始めます。それぞれ、計測時間の1/100秒と秒を表します。




例） 計測時間
44秒30

#### ●計測開始後60秒を過ぎると

計測開始後60秒を過ぎると同時にストップウオッチ用の1/100秒針が12時の位置で止まり､秒針と分針が動き続けます｡それぞれ､計測時間の秒と分を表します。
※ １分経過するたびに1/100秒針が１回転します。
※ 計測ストップ後、Ⓐボタンを押すと1/100秒を表すことができます｡1/100秒針が動いている間に計測ストップしたときはそのまま1/100秒を表しますので、Ⓐボタンを押す必要はありません。




例） 計測時間
2分44秒30

計測の流れ


Ⓐ スタート → Ⓐ ストップ → Ⓑ リセット

※ 積算計測…ロスタイムのある場合は､ストップ後リセットせずに再スタート（Ⓐボタン）すれば､表示タイムに引き続き計測を始めます。
※ 計測をリセットすると、ストップウオッチ用の1/100秒針と分針が早く回り出して、“0”に戻ります。秒針は現在時刻の秒に戻ります。
※ 針が早く回っている間はボタン操作はできませんのでご注意ください。

### ■ストップウオッチ用針位置の修正


計測ストップ後にⒷボタンを押しても1/100秒針と秒針が“0”の位置に戻らないときは、以下の操作を行なってください。

(1) リューズを２段引きます。
(2) Ⓐボタンを押して、1/100秒針を“0”の位置に合わせます。
(3) Ⓑボタンを押して、秒針を“0”の位置に合わせます。
(4) リューズを押し込みます。（リューズを引いている間は、通常時刻の針も止まりますので時刻を合わせ直してください。）





### ●リューズについて

防水時計の一部（特に10気圧･20気圧防水）でリューズがネジ込み式になっているものは時刻・カレンダーを合わせる際は左回しにしてネジ込みをゆるめた後、リューズを引いてください。（無理に引っ張らないでください。）
なお､リューズをゆるめた状態では防水機能を保てませんので､合わせ終わったら必ずネジ込みをしてください。





### ●回転ベゼルのついているものは

回転ベゼルを回し、▼マークを分針に合わせると、その位置をスタートとして経過時間を知ることができます。
※ 内転ベゼル方式になっているものは右上のリューズを回すとベゼルが回転します。





## Setting the Time and Date

- Some water resistant models are equipped with a screw lock crown.
- With such models, you must unscrew the crown in the direction noted in the illustration to loosen it before you can pull it out. Do not pull too forcibly on such crowns.
- Also note that such watches are not water resistant while their crowns are loosened. Be sure to screw the crowns back in as far as they will go after making any setting.




● The watch attached with a bezel can measure the elapsed time. Align the ▼ mark on the bezel with the minute hand by turning it so that the time elapsed from the ▼ mark can be measured.



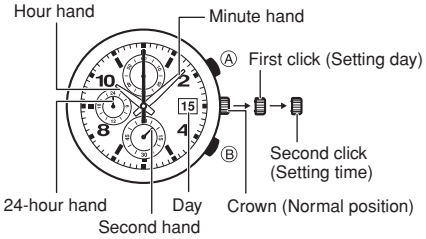
### To set the time


1. Pull the crown out to the second click.
   - At this time, the second hand will move to the 12 o'clock position and stop there.
2. Set the hands by rotating the crown. Rotate the crown to move the hands clockwise. Move the minute hand four or five minutes past the time you want to set, and then back it up to the proper setting.
   - Make sure that you also set the 24-hour hand to the correct hour of the day.
3. Push the crown back in to the normal position to restart timekeeping.

### To set the day

1. Pull the crown out to the first click.
2. Set the day by rotating the crown towards you.
3. Push the crown back in to the normal position.

- Avoid changing the date setting while the current time is between 9:00 p.m. and 1:00 a.m.


## Using the Stopwatch

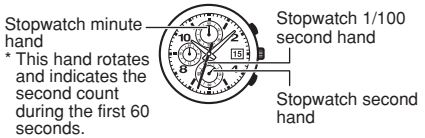


The stopwatch lets you measure elapsed time up to 59 minutes, 59.99 seconds.

### To measure elapsed time (First 60 seconds)


1. Press Ⓐ to start the stopwatch.
2. Press Ⓐ to stop the stopwatch.
   - You can resume the measurement operation by pressing Ⓐ again.
3. Check the elapsed time.
   - The example below shows an elapsed time of 44.30 seconds.




   - Press Ⓑ to reset the stopwatch. This will enter the Timekeeping Mode.

### To measure elapsed time (After the first 60 seconds)

1. Press Ⓐ to start the stopwatch.
   - During elapsed time measurement, the stopwatch 1/100 second hand automatically rotates for the final second of each minute.
2. Press Ⓐ to stop the stopwatch.
   - You can resume the measurement operation by pressing Ⓐ again.
3. Press the Ⓐ button, and the stopwatch 1/100 second hand will move to the 1/100 second count.
   - If the elapsed time operation was stopped during the final second of each minute, the stopwatch 1/100 second hand will already be pointing at the 1/100 second count. Do not press the Ⓐ button at this time, because doing so will restart the elapsed time operation.
4. Check the elapsed time.
   - The example below shows an elapsed time of two minutes, 44.30 seconds.

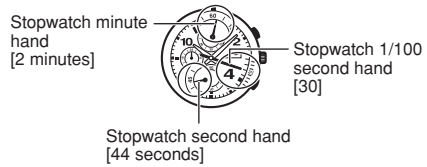


   - Press Ⓑ to reset the stopwatch. This will enter the Timekeeping Mode.

**Notes:**

- Do not try to perform stopwatch operations while the crown is pulled out either to the first or second click. If you try to press a button, you might accidentally cause the crown to rotate and change the current time or day setting.
- If the starting positions of the stopwatch second hand and 1/100 second hand become misaligned, use the following procedures to adjust the positions of the hands so they point to 12 o'clock when the stopwatch is reset.

### To adjust the positions of the stopwatch hands

1. Press Ⓑ to reset the stopwatch, and check the alignment of the stopwatch second hand and 1/100 second hand.
2. Pull out the crown to the second click.
3. Press Ⓐ to move the stopwatch 1/100 second hand.
4. If the stopwatch minute hand is aligned correctly, proceed to step 5. If the stopwatch minute hand is also misaligned, press Ⓑ to move the stopwatch second hand.
5. After making the adjustments you want, push the crown back in to its normal position.

- Note that pulling the crown out also stops the timekeeping second hand. After performing the above procedure, you should also adjust the timekeeping setting.