
# Operation Guide ANA(ST5)V.A

CASIO

## 時刻・カレンダーの合わせ方

※機種により形状は異なります。

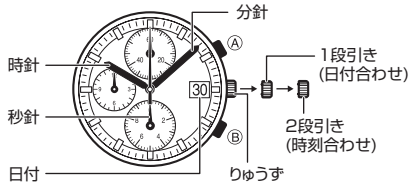


### ■時刻の合わせ方

(1) りゅうずを２段引きます。
※この時、秒針が 12 時の位置まで移動して止まります。
(2) りゅうずを回して、時刻を合わせます。
(3) りゅうずを押し込みます。

※時刻を合わせるときは、針を正転方向（進む方向）に回して合わせてゆき、分針を正しい時刻より４～５分進めてから逆に戻して合わせると正確に合わせることができます。
※時報は「時報サービス 117 番」が便利です。


### ■日付の合わせ方

(1) りゅうずを１段引きます。
(2) りゅうずを回して、日付を合わせます。
(3) りゅうずを押し込みます。

※日付は 31 日制になっていますので、2、4、6、9、11 月の月末には必ず修正してください。
※午後９時～午前１時の間は、日付合わせを行なわないでください（この間に日付合わせをすると翌日になっても変わらないことがあります）。


### ●りゅうずについて

防水時計の一部（特に10気圧・20気圧防水）でりゅうずがネジ込み式になっているものは時刻・カレンダーを合わせる際は左回しにしてネジ込みをゆるめた後、りゅうずを引いてください。（無理に引っ張らないでください。）
なお、りゅうずをゆるめた状態では防水機能を保てませんので、時刻合わせなどが終わったら必ずネジ込みをしてください。




### ●回転ベゼルのついているものは

回転ベゼルを回し、▼マークを分針に合わせると、その位置をスタートとして経過時間を知ることができます。
※内転ベゼル方式になっているものは右上のりゅうずを回すとベゼルが回転します。





## ストップウオッチの使い方

本機は、1/20 秒単位で 11 時間 59 分 59 秒 95（12 時間計）まで計測でき、以後０に戻って計測し続けます。

### ■計測のしかた

Ⓐボタンを押すごとに計測がスタート／ストップします。
※りゅうずを引いた状態では計測を行なわないでください。




### ●「ストップウオッチ用 1/20 秒針」について

- 計測スタート後、30 秒間、動きます（1/20 秒の計測値を指し示します）。
- 計測スタート後 30 秒経過すると、“0”の位置で止まります。
- “0”の位置で止まっている状態（計測スタート後30秒経過）で計測をストップすると、1/20 秒の計測値を指し示します。

計測の流れ

Ⓐ スタート → Ⓐ ストップ → Ⓑ リセット


※ 積算計測…ロスタイムのある場合は、ストップ後リセットせずに再スタート（Ⓐボタン）すれば、表示タイムに引き続き計測を始めます。
※計測をリセットすると、ストップウオッチ用の1/20秒針、秒針、分針、時針が早く回り出して、“0”の位置に戻ります。針が早く回っている間はボタン操作はできませんのでご注意ください。

ストップウオッチ機能を終了するときは、リセット状態でⒷボタンを押してください。ストップウオッチ用 1/20 秒針が「現在時刻の秒針」に戻ります。

### ■ストップウオッチ用針位置の修正


リセット状態でストップウオッチ用の 1/20 秒針や秒針が“0”の位置に戻らないときは、以下の操作を行なってください。

(1) りゅうずを2段引きます。




(2) Ⓐボタンを押して、ストップウオッチ用秒針を“0”の位置に合わせます。
※押し続けると早送りします。
(3) Ⓑボタンを押して、ストップウオッチ用1/20秒針を“0”の位置に合わせます。
※押し続けると早送りします。
(4) りゅうずを押し込みます。（りゅうずを引いている間は、通常時刻の針も止まりますので時刻を合わせ直してください。）

## Setting the Time and Day




### To set the time


1. Pull the crown out to the second click.
   • At this time, the second hand will move to the 12 o'clock position and stop there.
2. Set the hands by rotating the crown. Rotate the crown to move the hands clockwise. Move the minute hand four or five minutes past the time you want to set, and then back it up to the proper setting.
   • Carefully set the time, making sure to distinguish between AM and PM.
3. Push the crown back in to the normal position to restart timekeeping.

### To set the day

1. Pull the crown out to the first click.
2. Set the day by rotating the crown towards you.
3. Push the crown back in to the normal position.

• Avoid changing the date setting while the current time is between 9:00 p.m. and 1:00 a.m.

## Using the Stopwatch

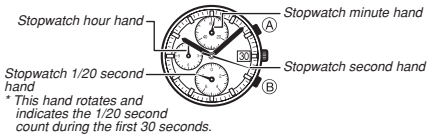


The stopwatch lets you measure elapsed time up to 11 hours, 59 minutes, 59.95 seconds.

### To measure elapsed time

1. Press Ⓐ to start the stopwatch.
2. Press Ⓐ to stop the stopwatch.
   • You can resume the measurement operation by pressing Ⓐ again.
   The stopwatch 1/20 second hand rotates and indicates the 1/20 second count during the first 30 seconds.
3. Check the elapsed time.
   • The example below shows an elapsed time of two minutes, 18.80 seconds.




   • Press Ⓑ to reset the stopwatch.
   This will enter the Timekeeping Mode.
   To return the function of the stopwatch 1/20 second hand to the timekeeping seconds hand (indicating the current seconds count), press Ⓑ again.

**Notes:**


• Do not try to perform stopwatch operations while the crown is pulled out either to the first or second click. If you try to press a button, you might accidentally cause the crown to rotate and change the current time or day setting.
• If the starting positions of the stopwatch second hand and 1/20 second hand become misaligned, use the following procedures to adjust the positions of the hands so they point to 12 o'clock when the stopwatch is reset.

### To adjust the positions of the stopwatch hands

1. Press Ⓑ to reset the stopwatch, and check the alignment of the stopwatch second hand and 1/20 second hand.
2. Pull out the crown to the second click.
3. Press Ⓐ to move the stopwatch second hand.
   • Holding down Ⓐ will start high-speed movement of the stopwatch second hand.
4. Press Ⓑ.
5. If the stopwatch 1/20 second hand is aligned correctly, proceed to step 6. If the stopwatch 1/20 second hand is also misaligned, press Ⓑ to move the stopwatch 1/20 second hand.
   • Holding down Ⓑ will start high-speed movement of the stopwatch 1/20 second hand.
6. After making the adjustments you want, push the crown back in to its normal position.

• Note that pulling the crown out also stops the timekeeping second hand. After performing the above procedure, you should also adjust the timekeeping setting.

• Some water resistant models are equipped with a screw lock crown.
• With such models, you must unscrew the crown in the direction noted in the illustration to loosen it before you can pull it out. Do not pull too forcibly on such crowns.
• Also note that such watches are not water resistant while their crowns are loosened. Be sure to screw the crowns back in as far as they will go after making any setting.



● The watch attached with a bezel can measure the elapsed time. Align the ▼ mark on the bezel with the minute hand by turning it so that the time elapsed from the ▼ mark can be measured.

