 © 2016 CASIO COMPUTER CO., LTD.

Quick Reference Manual 5466

CASIO

Congratulations upon your selection of this CASIO watch.

Bluetooth® is a registered trademark or trademark of Bluetooth SIG, Inc. of the United States.

Your watch has a Mobile Link function that allows it to communicate with a Bluetooth® SMART mobile phone and adjust its time settings to match those of the mobile phone.
- This product complies with or has received approval under radio laws in various countries and geographic areas. Use of this product in an area where it does not conform to or where it has not been approved under applicable radio laws may be punishable under local laws. For details, visit http://world.casio.com/ce/BLE/.
- Use of this product inside of an aircraft is restricted by the aviation laws of each country. Be sure to obey instructions provided by flight personnel concerning use of devices such as this product.

For details about functions, go to the website below and select your language for the EQB-600.
http://support.casio.com/wat/bs/

Using the Watch

Charging

Remove the watch from your wrist and place it in a brightly lit area.
- The watch may become hot when exposed to light for charging. Take care to avoid burn injury.
- Avoid charging in locations where it is very hot.

Power Saving
- Leaving the watch in a dark location for about one week will cause all hands to stop.


Battery Alerts
- Low Battery
  Second hand jumps every two seconds (Low Battery Alert).
- Dead Battery
  All hands stopped.

Setting the Time

1. Rotate the crown towards you to loosen it.
2. Pull the crown out to the second click.
   - This enables setting of your current location's time zone.




3. To set your time zone, first adjust the hour and minute hand positions so they are set approximately to the current time in your location.
   - Rotate the crown away from you (forward) or toward you (back) to change the setting in one-hour increments.
   - Hold down Ⓐ for about one second advances the time by 15 minutes.




Important!
- The above operation will cause the 3D Globe Dial at 3 o'clock to rotate in accordance with your time setting. When the time setting is at your current location's time, your time zone should be positioned at 12 o'clock on the 3D Globe Dial.

  Example: If you set the approximate time in Tokyo, Tokyo's time zone will be at 12 o'clock on the dial.

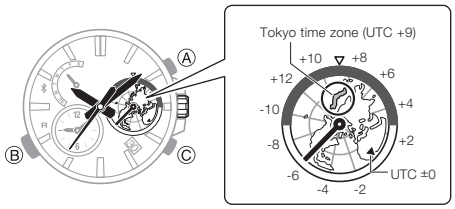

4. Hold down Ⓑ for about one second.
   - This enables setting of the current time minute.
5. Rotate the crown to move the minute hand to the current time's minute.
6. Press the Ⓑ button.
   - This enables setting of the current time hour.
7. Rotate the crown to move the hour hand to the current time's hour.
8. After the settings are the way you want, push the crown back in.

General Guide



1. Days of the week
2. Home Time hour and minute hands
3. 3D Globe Dial
4. ᛒ: Bluetooth connected *
5. R: Bluetooth standby
6. Dual Time hour and minute hands
7. Dual Time zone hand

* Hold down Ⓑ for about 1.5 seconds to connect via Bluetooth.

Specifications

Accuracy at normal temperature	: ±15 seconds a month
Timekeeping	: Hour, minute, second; date, day of the week Calendar system: Full-auto calendar from 2000 to 2099 Others: Dual time (hour, minute; Swapping with Home Time)
Mobile Link Functions	: Auto Time Correction Time setting automatically adjusted during a fixed time period. Auto summer time switching Automatic switching between standard time and summer time. Phone finder Watch operation sounds the alert of the mobile phone. Hand position correction Data Communication Specifications Bluetooth® Frequency Band: 2440MHz-2480MHz Maximum Transmission: 0 dBm (1 mW) Communication range: 2 meters max. (depends on environment)
Other	: Power Saving; Low battery alert; 3D Globe Dial (Current World Time)
Power Supply	: Solar panel and one rechargeable battery
Approximate Battery Life	: 5 months Conditions • Auto time correction: 4 times/day