 © 2017 CASIO COMPUTER CO., LTD.

User's Guide 5501 (OC)

CASIO

ENGLISH

Congratulations upon your selection of this CASIO watch.

For details about how to use this watch and for troubleshooting information, go to the website below.

https://world.casio.com/manual/wat/

• Keep the watch's face exposed to light as much as possible (page E-5).

Important!

• For details about how to adjust the current time zone, time, and day settings, see "Timekeeping (Current Time and Day Adjustment)" (page E-6).

Note that CASIO COMPUTER CO., LTD. assumes no responsibility for any damage or loss suffered by you or any third party arising through the use of your watch or its malfunction.

Features

Your watch provides you with the features and functions described below.

◆ **Solar powered operation** ..... **Page E-5**
The watch generates electrical power from sunlight and other types of light, and uses it to charge a battery that powers operation.

◆ **Accurate timekeeping** ..... **Page E-6**
Timekeeping is kept accurate using GPS signals and time calibration signals.
The watch communicates with a phone to acquire internet time info.

◆ **Current time in cities around the globe** ..... **Page E-8**
View the current time in 39 time zones* around the globe.
Simple swapping of World Time with current location time.
* Time zone data may be changed when the watch communicates with a phone.

◆ **Stopwatch** ..... **Page E-9**
The stopwatch measures elapsed time up to 24 hours in one-second increments.

Contents

Features **E-2**
Charging the Watch **E-5**
Timekeeping (Current Time and Day Adjustment) **E-6**
Mode Reference Guide **E-8**
Using the Watch in an Aircraft (Airplane Mode) E-10
Timekeeping (Based on GPS Signals) **E-11**
Appropriate Signal Reception Location (GPS Signal) E-11
Performing a GPS Signal Receive Operation Manually E-12
GPS Signal Auto Receive E-14
Timekeeping (Based on a Time Calibration Signal) **E-15**
Appropriate Signal Reception Location (Time Calibration Signal) E-15
Time Calibration Signal Auto Receive E-16
Using the Crown **E-17**
Specifications **E-18**


Bluetooth® is a registered trademark or trademark of Bluetooth SIG, Inc. of the United States.

Your watch has a Mobile Link function that allows it to communicate with a Bluetooth® mobile phone and adjust its time settings to match those of the mobile phone.

• This product complies with or has received approval under radio laws in various countries and geographic areas. Use of this product in an area where it does not conform to or where it has not been approved under applicable radio laws may be punishable under local laws. For details, visit https://world.casio.com/ce/BLE/.

• Use of this product inside of an aircraft is restricted by the aviation laws of each country. Be sure to obey instructions provided by flight personnel concerning use of devices such as this product.

Charging the Watch



• When you are not wearing the watch, leave it where its face (solar panel) is exposed to bright light for charging.

• To help ensure stable operation, expose the face of the watch to about a half day of direct sunlight each month to charge it.

• While wearing the watch, take care so your sleeve does not block its face (solar panel) from light. Charging efficiency may be reduced if the face (solar panel) is blocked from light, even partially.

Caution

• The case of the watch may become extremely hot when charging. Guard against burn injury.

Power Saving

• Leaving the watch in a dark location for about one hour between 10:00 p.m. and 5:50 a.m. will cause the second hand to stop.

• Leaving the watch in a dark location for about one week will cause all hands to stop.

Battery Alerts

• Low Battery
Second hand jumps every two seconds (Low Battery Alert).

• Dead Battery
All hands stopped.

Timekeeping (Current Time and Day Adjustment)

● For information about how to adjust time using a phone, refer to the Operation Guide available at the website below.
https://world.casio.com/manual/wat/

● After purchasing the watch, perform the procedure under "Acquiring GPS Position Information" (page E-12).

● To set the current time and day, normally use the procedure under "Time Calibration Signal Auto Receive" (page E-16). In areas where a time calibration signal cannot be received for some reason, set the current time and day using the procedure under "GPS Signal Auto Receive" (page E-14).

• Late night (between midnight and 5:00 a.m.): The receive operation starts at regular intervals until receive is successful (Time Calibration signal).

• Daytime (between 6:00 a.m. and 10:00 p.m.): The receive operation will start automatically when the watch is continually expose to light (GPS).

• Once a time calibration or GPS signal receive operation is successful, no more Auto Receive operations are performed that day.

● If the current time setting is not correct, perform the procedure under "Receiving GPS Time Information" (page E-13).

● If you move into another time zone, perform the procedure under "Acquiring GPS Position Information". Next, perform one of the procedures under "Time Calibration Signal Auto Receive", "GPS Signal Auto Receive", or "Receiving GPS Time Information" to set the current time and day.

• Even if you are unable to perform a GPS signal and/or time calibration signal receive operation for some reason, the watch will keep time with average monthly accuracy of ±15 seconds.


Important!

• If the current time and day setting is wrong after you perform one of the procedures under "Time Calibration Signal Auto Receive", "GPS Signal Auto Receive", or "Receiving GPS Time Information", try acquiring position information (GPS) and then perform the time/day setting procedure again.

• If you feel that the current time and/or day indicator are not in the correct positions, you can adjust their alignment. For details, see the Operation Guide available at the CASIO website.

• Time calibration signal reception is normally possible in the areas below.
Japan, China, North America, Europe
For details, see the Operation Guide available at the CASIO website.

• For details about the following operations, see the Operation Guide available at the CASIO website: Configuring Home City (time zone), summer time, current time, and current day settings manually.
https://world.casio.com/manual/wat/

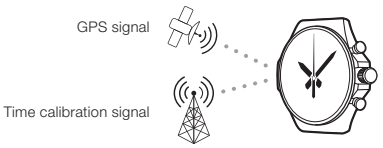


User's Guide 5501 (OC)

CASIO

Mode Reference Guide

- Operation details: Operation Guide available at the CASIO website.
- Use Ⓒ to navigate between modes.
- Holding down Ⓒ for one second in any mode returns to the Timekeeping Mode.
- Hold down Ⓒ for about 2.5 seconds to establish a Bluetooth connection with a phone. For details, refer to the Operation Guide available at the CASIO website.

Timekeeping Mode




- In the Timekeeping Mode (not in the Airplane Mode), the day of the week hand will point to the current day of the week.
- In the Airplane Mode, the day of the week hand points to the airplane (✈) mark instead of the day of the week.

Ⓐ button
- Hold down for about three seconds to swap your World Time with your current location time.

Ⓑ button
- Press once to check the last receive result and the battery level. After about one or two seconds, the time zone and city name will be indicated.
- Hold down for about 1.5 seconds to start time information acquisition from the GPS. Press again while reception is in progress to acquire location information from the GPS.


Ⓒ

Stopwatch Mode



Using the Watch in an Aircraft (Airplane Mode)

- Switch to the Airplane Mode whenever you are inside an aircraft or in any other area where radio wave reception is prohibited or restricted.
- Entering the Airplane Mode disables GPS signal and time calibration signal reception.
- While in the Timekeeping Mode, press Ⓑ once and then pull out the crown to the first click. The second hand will move to Y (receive enabled) or N (receive disabled). To enter the Airplane Mode (receive disabled), rotate the crown to align the second hand with N. To exit the Airplane Mode (receive enabled), align the second hand with Y. After the setting is the way you want, push the crown back in to its normal position.



Timekeeping (Based on GPS Signals)

Appropriate Signal Reception Location (GPS Signal)

When performing GPS signal reception, move the watch outside where there is a clear view of the sky above, with no obstructing buildings, trees, or other objects.



Note
- If you experience signal reception problems, keep the watch still and point its display straight up at the sky.
- While a receive operation is being performed, take care to avoid covering the watch face with your sleeve.
- You may experience GPS signal reception problems in the areas described below.
  - Where the view of the sky above is narrow
  - Near trees or buildings
  - Near a train station, airport, or other congested areas

- GPS signal reception is not possible in the areas described below.
  - Where the sky is not visible
  - Underground or in a tunnel
  - Indoors (Reception may be possible near a window.)
  - Near wireless communication equipment or other devices that generate magnetism


Performing a GPS Signal Receive Operation Manually

◆ Acquiring GPS Position Information

When position information is acquired successfully, the watch is able to determine its current location and adjust its time and day setting accordingly.

Important!
- Perform this operation in the Timekeeping Mode (not in the Airplane Mode). See "Mode Reference Guide" (page E-8).


1. Move to a location appropriate for signal reception and orient the watch so its face is pointing straight upwards.
   - See "Appropriate Signal Reception Location (GPS Signal)" (page E-11).
2. Hold down Ⓑ until the second hand moves to **T (TIME)**. Release Ⓑ after the second hand reaches **T (TIME)**. Pressing Ⓑ again will cause the second hand to move to **T+P** and start location information acquisition.
   - Position information reception takes anywhere from about 30 seconds to 80 seconds. It can take as long as 13 minutes.
   - Successful acquisition of position information will automatically display the time and day for the resulting location.
   - Position information acquisition requires large amounts of power. Perform the acquisition operation only when it is required.



◆ Receiving GPS Time Information

Perform this operation when you suspect that the time normally indicated by the watch is not correct.
- If the GPS signal time information receive operation is successful, the watch will automatically adjust the current time and day settings of the Home City (time zone).

Important!
- Perform this operation in the Timekeeping Mode (not in the Airplane Mode). See "Mode Reference Guide" (page E-8).



1. Move to a location appropriate for signal reception and orient the watch so its display is pointed straight up at the sky. See "Appropriate Signal Reception Location (GPS Signal)" (page E-11).
2. Hold down Ⓑ until the second hand moves to **T (TIME)**. Release Ⓑ after the second hand reaches **T (TIME)**. This will start time info reception.
   - Reception normally takes anywhere from six seconds to 60 seconds. It can take as long as 13 minutes.
   - When the receive operation is successful, the watch will adjust its current time and day settings automatically.
   - This operation requires large amounts of power. Perform it only when necessary.

GPS Signal Auto Receive

Important!
- Perform the signal receive operation in the Timekeeping Mode (not in the Airplane Mode). See "Mode Reference Guide" (page E-8).

GPS signal time information is received automatically whenever all of the conditions described below are satisfied.
- The current time is between 6:00 a.m. and 10:00 p.m.
- The face of the watch has been exposed continuously for about one or two minutes to light equivalent to the brightness near a window on a clear day.
- All time calibration signal receive operations performed during the previous night were unsuccessful.

Timekeeping (Based on a Time Calibration Signal)

Appropriate Signal Reception Location (Time Calibration Signal)

- Keep the watch away from metal and position it so its 6 o'clock side is facing a window. Avoid moving the watch as much as possible and do not perform any watch operations while a signal receive operation is in progress.



You may experience time calibration signal reception problems in the areas described below.
- Among or near buildings
- While riding in a vehicle
- Near household appliances, office machines, mobile phones, etc.
- On a construction site, in an airport, or any other location where radio wave interference occurs
- Near high-voltage lines
- In mountainous areas or behind a mountain

- Always check the time setting on the day there should be a switch between standard time and summer time (DST). If the setting is not correct (due to signal reception failure), turn DST on or off manually as required.

Time Calibration Signal Auto Receive

Important!

- To perform time calibration signal auto receive, the watch must be in the Timekeeping Mode (not in the Airplane Mode). See "Mode Reference Guide" (page E-8).

Leave the watch in a location that is appropriate for time calibration signal reception between the hours of midnight and 5:00 a.m. See "Appropriate Signal Reception Location (Time Calibration Signal)" (page E-15).

- The second hand will point to **RC** while time calibration signal reception is in progress.
- Reception normally takes anywhere from about two to ten minutes, but it can take as long as 20 minutes.
- When the receive operation is successful, the time and day settings will be adjusted automatically.

Using the Crown

- You can change the following settings by operating the watch's crown: World Time City (time zone), Home City (time zone), summer time (DST), and current time.
- For details about crown operations, see the Operation Guide available at the CASIO website. https://world.casio.com/support/

Important!

- In order to prevent loss of water resistance and damage due to impact, make sure that the crown is fully pushed in to its normal position when using the watch.

Specifications

Accuracy at normal temperature: ±15 seconds a month (When receive of a calibration signal or communication with a phone for time adjustment is not possible.)

Timekeeping : Hour, minutes, seconds, 24-hour, day, day of the week
Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099
Other: Home City (Time Zone) and World Time City (Time Zone) can be assigned one of 39 time zones* and Coordinated Universal Time; Daylight Saving Time (summer time)/Standard Time auto switching
* Time zone data may be changed when the watch communicates with a phone.

Signal receive function: GPS signal auto receive, manual receive
Time calibration signal auto receive
Auto transmitter selection (for JJY, MSF/DCF77)
Receivable call signs: JJY (40 kHz/60 kHz), BPC (68.5 kHz), WWVB (60 kHz), MSF (60 kHz), DCF77 (77.5 kHz)
Last reception result display
Manual and auto standard time/summer time switching

Mobile Link Functions:
Auto Time Correction
Time setting automatically adjusted during a fixed time period.
Auto summer time switching
Automatic switching between standard time and summer time.
Hand position correction

Data Communication Specifications
Bluetooth®
Communication range: 2 meters max. (depends on environment)

Stopwatch: Measuring capacity: 23:59'59"
Measuring unit: 1 second
Measuring modes: Elapsed time

Other: Power Saving; Low battery alert; Auto Correction of Hand Home Positions; Airplane Mode (disables data communication)

Power Supply: Solar panel and one rechargeable battery
Approximately 7 months
Not exposed to light under the conditions below.
GPS time information receive: 1 operation (approximately 10 seconds) every 2 days
GPS time position information receive: 1 operation (approximately 45 seconds)/month

Specifications are subject to change without notice.

For open source information, visit the CASIO website.
https://world.casio.com/manual/wat/