 © 2020 CASIO COMPUTER CO., LTD.

User's Guide 5652 (OC)

CASIO

ENGLISH

Congratulations upon your selection of this CASIO watch.

For details about how to use this watch and for troubleshooting information, go to the website below.

https://world.casio.com/manual/wat/

- Keep the watch's face exposed to light as much as possible (page E-5).

Important!
- For details about how to adjust the current time zone, time, and day settings, see "Timekeeping (Current Time and Day Adjustment)" (page E-7).

Features

Your watch provides you with the features and functions described below.

◆ Solar powered operation ..... Page E-5
The watch generates electrical power from sunlight and other types of light, and uses it to charge a battery that powers operation.

◆ Accurate timekeeping ..... Page E-7
Timekeeping is kept accurate using information provided by receipt of a time calibration signal and by communication with a phone.

◆ Current time in cities around the globe ..... Page E-8
View the current time in 27 cities (38 time zones) around the globe.
Simple swapping of World Time with your Home Time.

◆ Stopwatch ..... Page E-9
The stopwatch measures elapsed time up to 24 hours in one-second increments.


The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by CASIO COMPUTER CO., LTD. is under license.

This product has a Mobile Link function that lets it communicate with a Bluetooth® capable phone to perform automatic time adjustment and other operations.
- This product complies with or has received approval under radio laws in various countries and geographic areas. Use of this product in an area where it does not conform to or where it has not been approved under applicable radio laws may be punishable under local laws. For details, visit https://world.casio.com/ce/BLE/.
- Use of this product inside of an aircraft is restricted by the aviation laws of each country. Be sure to obey instructions provided by flight personnel concerning use of devices such as this product.

Contents

Features E-2
Charging the Watch E-5
Timekeeping (Current Time and Day Adjustment) E-7
Mode Reference Guide E-8
Using the Watch in a Medical Facility or Aircraft E-10
Timekeeping (Based on a Time Calibration Signal) E-11
Appropriate Signal Reception Location (Time Calibration Signal) E-11
Time Calibration Signal Auto Receive E-12
Time Calibration Signal Manual Receive E-13
City (Time Zone) Setting E-14
Home City (Time Zone) Setting E-14
World Time City (Time Zone) Setting E-15
Configuring Time and Date Settings Manually E-16
Specifications E-17

Charging the Watch




- When you are not wearing the watch, leave it where its face (solar panel) is exposed to bright light for charging.
- To help ensure stable operation, expose the face of the watch to about a half day of direct sunlight each month to charge it.

- While wearing the watch, take care so your sleeve does not block its face (solar panel) from light. Charging efficiency may be reduced if the face (solar panel) is blocked from light, even partially.

Caution
- The case of the watch may become extremely hot when charging. Guard against burn injury.

Power Saving
- Leaving the watch in a dark location for about one hour between the hours of 10:00 p.m. and 5:50 a.m. will cause the second hand to stop at 12 o'clock.
- Leaving the watch in a dark location for about one week will cause all hands to stop.

Charge Level Indication
- The current charge level is temporarily indicated right after you enter the Timekeeping Mode. See "Mode Reference Guide" (page E-8).



Battery Alerts
- Low Battery
  Second hand jumps every two seconds (Low Battery Alert).
- Dead Battery
  All hands stopped.

Timekeeping (Current Time and Day Adjustment)

Timekeeping is kept accurate using information provided by a time calibration signal and by communication with a mobile phone.
- Time calibration signals can be received using Auto Receive or Manual Receive (page E-11).
- To set the current time and day, normally use the procedure under "Time Calibration Signal Auto Receive" (page E-12).
- For information about how to adjust time using a phone, refer to the Operation Guide available at the website below.
  https://world.casio.com/manual/wat/
- Time calibration signal auto receive is not performed while the watch is able to connect with a phone to adjust the watch time setting. Signal reception is performed whenever the watch is unable to connect with a phone for time adjustment for more than one day.
- If you are in an area where a time calibration signal cannot be received or if you cannot connect with a phone for some reason, adjust time and date settings manually (page E-16).

Important!
- For the watch to be able to receive a time calibration signal, its Home City setting must be one where time calibration signal reception is normally supported (pages E-14 and L-2).
- If you feel that the current time and/or day indicator are not in the correct positions, you can adjust their alignment. For details, see the Operation Guide available at the CASIO website.
- Time calibration signal reception is normally possible in the areas below.
  Japan, China, North America, Europe
  For details, see the Operation Guide available at the CASIO website.


User's Guide 5652 (OC)

CASIO

Mode Reference Guide

• Use Ⓒ to navigate between modes.


Timekeeping Mode



- To swap your Home Time with the World Time, hold down Ⓐ for three seconds.
- To view the result of last time calibration by time signal reception or Mobile Link, press Ⓑ once.
- To trigger a time calibration by Mobile Link manually, hold down Ⓑ for 0.5 seconds.
- To trigger a time calibration signal reception operation manually, hold down Ⓑ for 1.5 seconds.
- To search for the phone paired with the watch, hold down Ⓑ for 4.5 seconds.
- Press Ⓒ once to enter the Stopwatch Mode.

Ⓒ

Stopwatch Mode




• Holding down Ⓒ for at least one second in any mode returns to the Timekeeping Mode.

*1 The A-side of the dial indicates an a.m. time, while the P-side indicates a p.m. time.

• Hold down Ⓒ for about 3.5 seconds to establish a Bluetooth connection with a phone. For details, refer to the Operation Guide available at the CASIO website.
https://world.casio.com/manual/wat/

Using the Watch in a Medical Facility or Aircraft

- Disable auto time adjustment whenever you are in a medical facility, and aircraft, in any other area where radio wave reception and connection with a phone are prohibited or restricted.
- Disabling auto time adjustment disables time calibration signal auto receive and auto connection with a phone.
- In the Timekeeping Mode, press Ⓑ once and then pull out the crown to the first click. The second hand will move to **Y (YES)** (auto receive enabled) or **N (NO)** (auto receive disabled). To disable auto time adjustment, rotate the crown to move the second hand to **N (NO)**. To enable auto time adjustment, rotate the crown to move the second hand to **Y (YES)**. After the setting is the way you want, push the crown back in to its normal position.



Timekeeping (Based on a Time Calibration Signal)

Appropriate Signal Reception Location (Time Calibration Signal)

- Keep the watch away from metal and position it so its 6 o'clock side is facing a window. Avoid moving the watch as much as possible and do not perform any watch operations while a signal receive operation is in progress.



You may experience time calibration signal reception problems in the areas described below.

- Among or near buildings
- While riding in a vehicle
- Near household appliances, office machines, mobile phones, etc.
- On a construction site, in an airport, or any other location where radio wave interference occurs
- Near high-voltage lines
- In mountainous areas or behind a mountain

- Always check the time setting on the day there should be a switch between standard time and summer time (DST). If the setting is not correct (due to signal reception failure), turn DST on or off manually as required.

Time Calibration Signal Auto Receive


Important!

- To perform time calibration signal auto receive, the watch must be in the Timekeeping Mode. See "Mode Reference Guide" (page E-8).
- For information about areas where time calibration signals can be received, go to the section below "City (Time Zone) List"(page L-2).

Leave the watch in a location that is appropriate for time calibration signal reception between the hours of midnight and 5:00 a.m. See "Appropriate Signal Reception Location (Time Calibration Signal)" (page E-11).

- The second hand will point to **RC** while time calibration signal reception is in progress.
- Reception normally takes anywhere from about two to ten minutes, but it can take as long as 20 minutes.
- When the receive operation is successful, the time and day settings will be adjusted automatically.
- You can disable auto receive if you want. See "Using the Watch in a Medical Facility or Aircraft" (page E-10).

Time Calibration Signal Manual Receive



1. Hold down Ⓑ for at least 1.5 seconds until the second hand moves to **RC**. If the second hand is a position other than **RC**, keep Ⓑ depressed until it moves to **RC**.
2. Place the watch near a window.
   - The time setting will be adjusted automatically when a signal receive operation is successful.
   - Calibration signal reception normally takes anywhere from about two to 10 minutes. It can take as long as 20 minutes.
   - Best reception is in the middle of the night.


City (Time Zone) Setting

Important!

- In order to prevent loss of water resistance and damage due to impact, make sure that the crown is fully pushed in to its normal position after operating it.
- Operation details: Operation Guide available at the CASIO website.
https://world.casio.com/manual/wat/

Home City (Time Zone) Setting


1. In the Timekeeping Mode, pull the crown out to the second click.
   - Rotate the crown to move the second hand to the city or time zone you want to select.



World Time City (Time Zone) Setting

Shows current World City time.

1. In the Timekeeping Mode, pull the crown out to the first click.
   - Rotate the crown to move the second hand to the city or time zone whose date and time you want to select.




User's Guide 5652 (OC)

CASIO

Configuring Time and Date Settings Manually

Pull out the crown to the second click, hold down Ⓒ for at least one second, and then perform the operations below to adjust the time and date settings.

(Example: Setting to June 30, 2021)

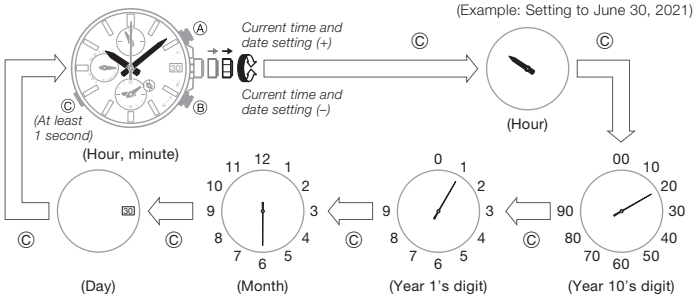

- Operation details: Operation Guide available at the CASIO website.
  https://world.casio.com/manual/wat/

Specifications

Accuracy at Normal Temperature: ±15 seconds a month
Timekeeping: Hour, minute, second; date, day of the week
Calendar system: Full-auto calendar from 2000 to 2099
Signal Receive Function:
Auto receive, manual receive
Auto transmitter selection (for JJY, MSF/DCF77)
Receivable call signs: JJY (40 kHz/60 kHz), BPC (68.5 kHz), WWVB (60 kHz), MSF (60 kHz), DCF77 (77.5 kHz)
Last reception result display
Automatic and manual switching between standard time and summer time.
World time: Hour, minute, 24-hour timekeeping, 27 world cities (38 time zones), auto summer time setting, Home City/World Time City swapping
Stopwatch:
Measuring unit: 1 second
Measuring capacity: 23:59'59" (24 hours)
Measurement function: Elapsed time

Mobile Link Functions:
Auto Time Correction
Time setting adjusted automatically at preset time.
One-touch Time Correction
Manual connection and time adjustment
Phone finder
Watch operation sounds the alert sound of the mobile phone.
World Time
Current time for approximately 300 cities selected for the watch Home Time/World Time swapping
Auto summer time switching
Automatic switching between standard time and summer time
Hand position correction
Data Communication Specifications
Bluetooth®
Frequency Band: 2400MHz-2480MHz
Maximum Transmission: 0 dBm (1 mW)
Communication range: 2 meters max. (depends on environment)
Other: Power Saving; Battery power indicator; Auto Correction of Hand Home Positions
Power Supply: Solar panel and 1 rechargeable battery
Battery Operating Time:
Approximately 5 months

Conditions
Not exposed to light under the conditions below.
- Auto time adjustment: 4 times/day
- Power saving: 6 hours/day

Specifications are subject to change without notice.

City (Time Zone) List

City (Time Zone) List

City Code	City	UTC Offset/GMT Differential	Radio wave to be received	Summer Time Period	
				Summer Time Start	Summer Time End
UTC		0		None	None
LON	LONDON*	0	MSF/DCF77	01:00, last Sunday in March	02:00, last Sunday in October
PAR	PARIS*	+1		02:00, last Sunday in March	03:00, last Sunday in October
ATH	ATHENS*	+2		03:00, last Sunday in March	04:00, last Sunday in October
JED	JEDDAH	+3	–	None	None
–	–	+3.5			
DXB	DUBAI	+4			
–	–	+4.5			
–	–	+5			
DEL	DELHI	+5.5			
–	–	+5.75			
DAC	DHAKA	+6			
–	–	+6.5			
BKK	BANGKOK	+7			
HKG	HONG KONG*	+8	BPC		

City Code	City	UTC Offset/GMT Differential	Radio wave to be received	Summer Time Period	
				Summer Time Start	Summer Time End
–	–	+8.75	–	None	None
TYO	TOKYO*	+9	JJY		
–	–	+9.5	–	02:00, first Sunday in October	03:00, first Sunday in April
SYD	SYDNEY	+10			
–	–	+10.5		None	None
NOU	NOUMEA	+11			
WLG	WELLINGTON	+12		02:00, last Sunday in September	03:00, first Sunday in April
–	–	+12.75		None	None
TBU	NUKUALOFA	+13			
CXI	KIRITIMATI	+14			
BAR	BAKER ISLAND	–12			
PPG	PAGO PAGO	–11			
HNL	HONOLULU	–10			
–	–	–9.5			
ANC	ANCHORAGE	–9		02:00, second Sunday in March	02:00, first Sunday in November
LAX	LOS ANGELES*	–8	WWVB		
DEN	DENVER*	–7			
CHI	CHICAGO*	–6			

City Code	City	UTC Offset/GMT Differential	Radio wave to be received	Summer Time Period	
				Summer Time Start	Summer Time End
NYC	NEW YORK*	–5	WWVB	02:00, second Sunday in March	02:00, first Sunday in November
YHZ	HALIFAX*	–4			
–	–	–3.5	–	None	None
RIO	RIO DE JANEIRO	–3		0:00, third Sunday in October	0:00, third Sunday in February or 0:00, fourth Sunday in February
FEN	F. DE NORONHA	–2		None	None
RAI	PRAIA	–1			

* Cities where auto receive is normally supported.
- As of January 2020, summer time has been halted in Brazil (Rio de Janeiro). However, the Auto DST operation of this watch does not reflect this change.
- For details about city (time zone), and summer time settings, refer to the Operation Guide available at the CASIO website.
  https://world.casio.com/manual/wat/